

FatMax® PB2 Self Leveling Laser Plumb Bob

This self leveling laser plumb bob creates an accurate, highly visible plumb reference instantly. Instantly transfers point from floor to ceiling. Ideal for sloped ceilings. One button self-leveling- up to 1/8-in at 50-ft leveling accuracy and 100-ft working range.

- Unique magnetically dampened self-leveling system settles plumb bob up to 20 times faster than conventional methods
- One button— transfer point from floor to ceiling
- 1/4-20 mounting thread and strong, built-in magnets secure directly to drywall track.




EDP#	LASER DIODE	LEVELING ACCURACY	LEVELING SPEED	SELF LEVELING	POWER
77-189	635-670nm (Class 3R)	UP: ±1/8-in @ 50-ft (±3mm @ 15m) DOWN: ±1/4-in @ 50-ft (±6mm @ 15m)	<3 seconds	Pendulum, ±5°	3 "AA" Alkaline batteries

EDP#	CONTENTS	WARRANTY
77-189	PB2 Package. Includes 3-"AA" batteries, carrying case	1

FatMax® SP1X Tropedo Laser Level Kit

A professional grade pocket level with a magnetic base for all types of leveling jobs. Built-in leveling base with leveling feet.

- Two precision vials— level and circular "bulls-eye" for plumb
- Magnetic base with special leveling adjustment for maximum leveling accuracy
- Built for Interior Use

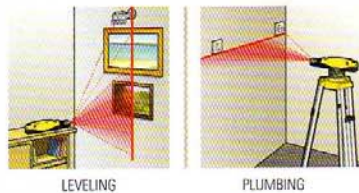

EDP#	LASER DIODE	LEVELING ACCURACY	WORKING RANGE	VIAL SENSITIVITY	LEVELING TYPE	POWER
77-190	635-670nm (Class 3R)	Horizontal: ±6mm @ 15m Vertical: ±6mm @ 6m	Up to 50 ft (15m)	Level ±20 minutes Plumb ±30 minutes	Manual, with base adjusting screw	3 "AA" Alkaline batteries

EDP#	CONTENTS	WARRANTY
77-190	Includes: Laser "chalk" line adapter, beam splitter-90°, magnetic laser tripod, 3 "AA" Alkaline batteries	90 days